


# MX-62 6 Channel Mixer

**6CH XLR balanced input, XLR balanced level L/R direct input (2ch), RCA pin AUX L/R input, XLR balanced line level L/R output, On/Off switch for Phantom power voltage, Limiter and High pass filter, input peak indicator, VU meter for the line level output with peak indicator, Pan control each channel.**



**1U**

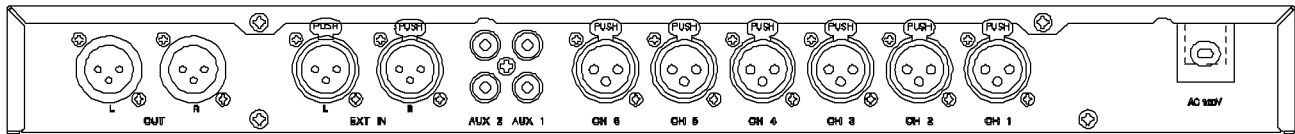

Input	Balanced Input	XLR-3Pin (female) x 6 +4dBu / -3dBu / -55dBu (ch1~6) XLR-3Pin (female) x 2 Direct Input +4dBu
	Unbalanced Input	PCA (L/R) two way AUX IN
Output	Balanced Output	XLR-3Pin (male) x 2 (L/R)
	Reference Level	+4dBu (Loading 10kΩ or more Balance out 600Ω)
Power		DC 12V / 2A (AC/DC Adaptor)
Dimensions		435(W) x 44(H) x 270(D) mm
Weight		2.25kg
Feature		Phantom power (48V each ch, On/Off switch)
		Peak indicator each ch
		Limiter (each ch, On/Off switch)
		Low cut filter (each ch, On/Off switch)
		VU meter x 2 (for audio out level check)

**AZDEN corporation**

200 Valley Road, Suite 101, Mt. Arlington, NJ 07856, Phone (973)810-3070, Fax (973)810-3076  
 e-mail: sales@azdencorp.com, web site: www.azdencorp.com